


# FREE COOLING SYSTEMS

## Extraction air system with grids FC-GR Series

Indoor installation  
Air flow rate from 1000 m<sup>3</sup>/h to 4000 m<sup>3</sup>/h

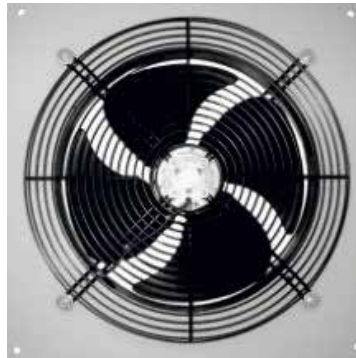

The Free-cooling system has the characteristic of guaranteeing continuous air changes with the primary objective of transferring the heat generated by the equipment to the external environment (for dissipation). Solution designed to allow high ENERGY SAVING also in site where air conditioning units without free cooling system were previously installed.

### MAIN FEATURES

- PLC control
- EC axial fan, 48Vdc (230Vac on request)
- Low noise levels

### MODE OF OPERATION

